

Stanwood® 10 oz Metal Winder Arm Adjustment

Step 1

- Acquire an adjustable wrench



Step 2

- Locate the nut on the back of the winder



Step 3


- Secure the metal to the end of a table
- Hold the winder with your free hand
- Loosen the nut using your wrench by turning counter-clockwise
- Leave the nut on the winder, or keep the nut and washer in a safe place



Stanwood® 10 oz Metal Winder Arm Adjustment


Step 4

- Pull the upper body housing from the base

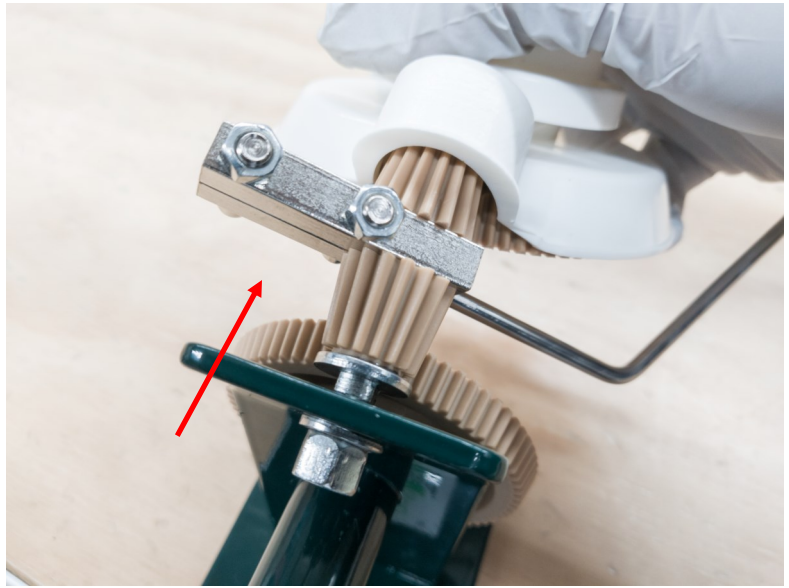


Step 5

- Wiggle the bolt to adjust the gears, turn handle to find the optimum position for the gears

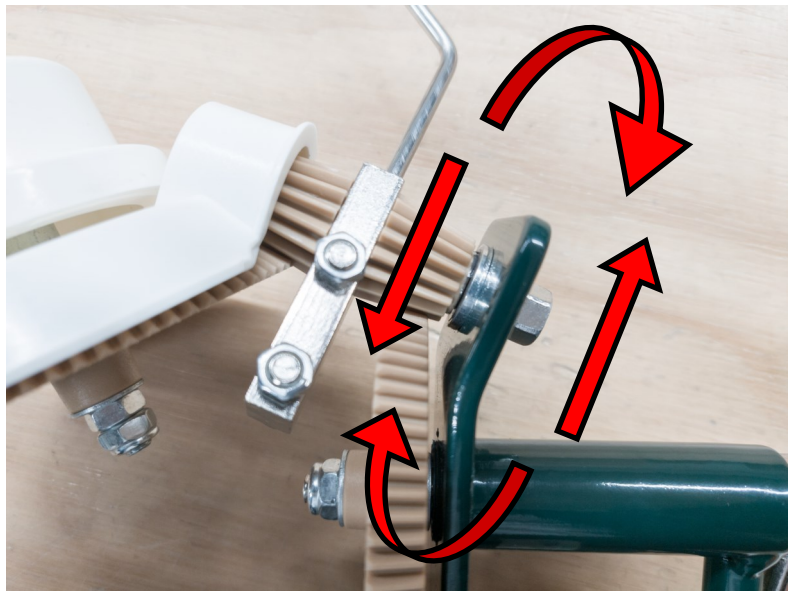

Step 6

- Push the upper body housing into the base

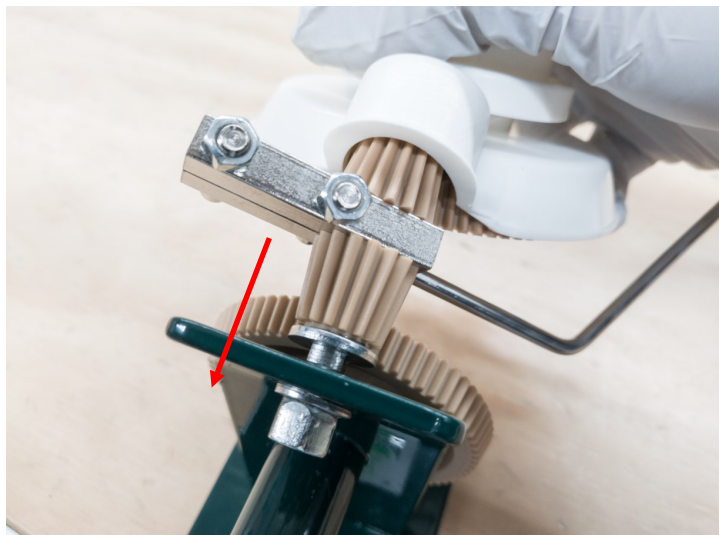

Stanwood® 10 oz Metal Winder Arm Adjustment

Step 7

- Tighten the nut, make sure the upper body housing is secured into place



Any questions or comments please contact us at
stanwoodimports@yahoo.com or sales@orientalhomegarden.com

Or scan the QR code

