

# BRASS CONNECTOR REPLACEMENT


## STEP 1.

Aquire a wrench.



## STEP 2.

- Locate the brass hub on the ground pole.
- The brass hub is the piece with male threads.

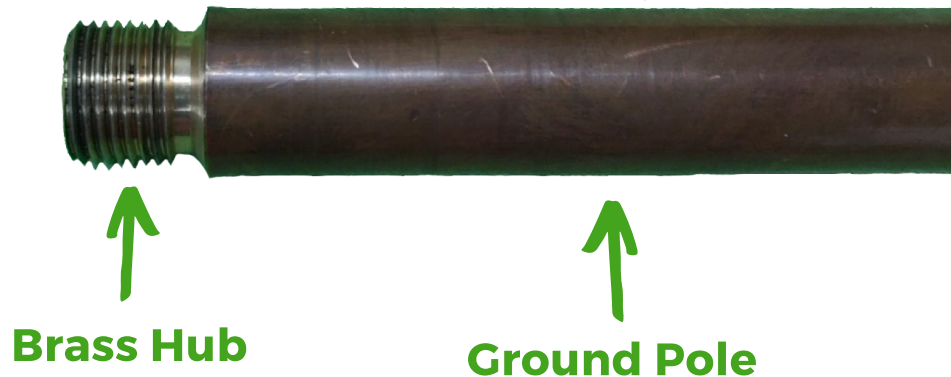

## STEP 3.

- Cover the threads with a piece of cloth and wrap it tightly around the hub. Make sure that there is enough that it feels like soft padding.
- If you don't care about damaging the threads, you can disregard this step.



## STEP 4.

- Place the wrench over the brass hub and turn it counter-clock wise, it will come loose after some force.
- Once it's loose, take it out either by wrench by your hand.



## STEP 5.

Take out the brass connector and set it a side.



## STEP 6.

- Once you have taken out the brass connector, use the end that was previously threaded into the ground pole and screw it into the upper section of the pole. Test to see if it screws in smoothly.
- If you are replacing the hub, disregard this step.



ANY QUESTIONS PLEASE CONTACT US AT:  
[stanwoodimports@yahoo.com](mailto:stanwoodimports@yahoo.com)  
[sales@orientalhomegarden.com](mailto:sales@orientalhomegarden.com)

Tel: (888) 670-5570

Copyright © Stanwood Imports / Oriental Touch LLC

