

# YARN BALL WINDER-A GEAR REPLACEMENT

## STEP 1.

Acquire a

- Needle nose plier
- Small flat-head screwdriver
- Phillip-head screwdriver



## STEP 2.

Using the small flat-head screwdriver, take out the small “e” clip from the center rod.



## STEP 3.

- Take off the top cover.
- Use the small flat-head screwdriver to take off the “e” clip from the bottom gear.



## STEP 4.

With all of the clips taken off, flip the winder over.




## STEP 5.

Remove the two Philip-head screws using the screwdriver.



## STEP 6.


Remove the white cover from the blue base.

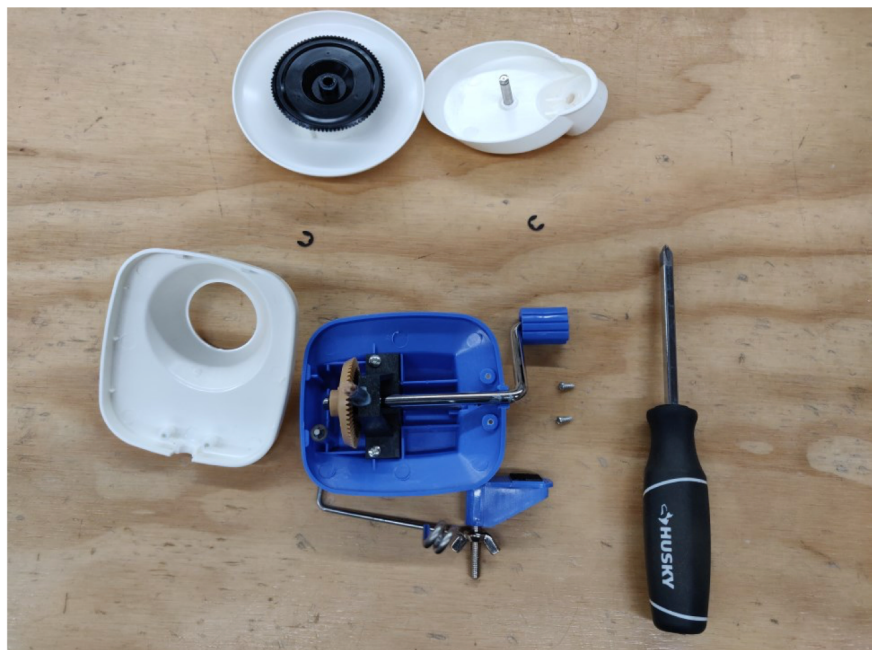




## STEP 7.

Using the small flat-head screwdriver, take off the final “e” clip from the gear, and keep it in a safe location.

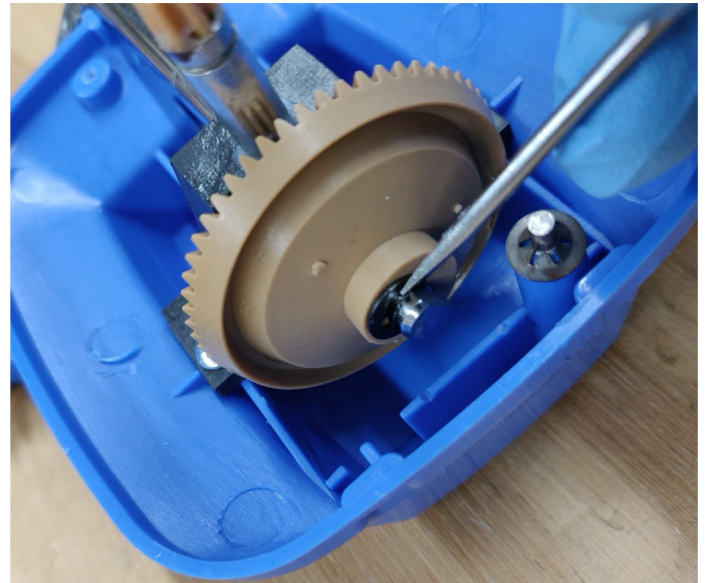

## STEP 8.

Pull on the gear until it dislodges, you may need to use both hands to perform this action. One hand should hold on to the blue base while the other hand pulls on the gear lever.

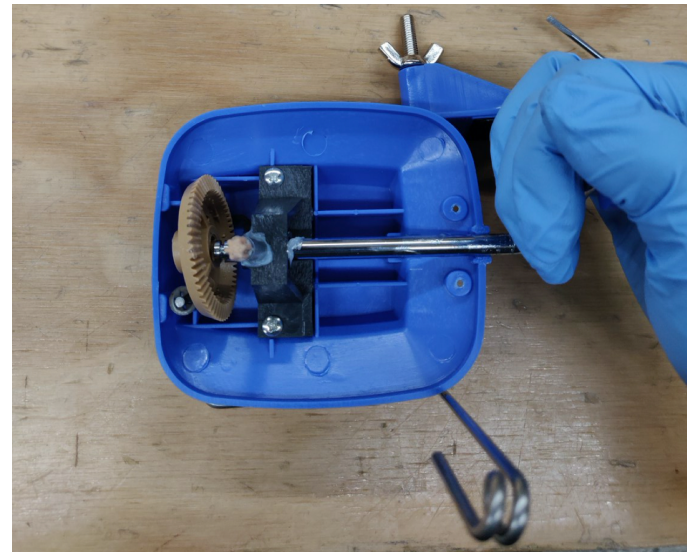

## STEP 9.

Replace the gear and clamp on the “e” clip with a needle nose plier.



## STEP 10.

Close the cover on the side closest to the gear and pay attention to the small clips.



## STEP 11.

- Screw on the two screws using the Philip-head screw driver.
- Put on the second to last cover. Make sure the gears are meshing.
- Clamp on the “e” clip using the needle nose plier.



## STEP 12.

- Put on the last cover.
- Clamp on the last “e” clip and turn the winder to make sure all gears are meshing and the winder is turning smoothly.



ANY QUESTIONS PLEASE CONTACT US AT:  
[stanwoodimports@yahoo.com](mailto:stanwoodimports@yahoo.com)  
[sales@orientalhomegarden.com](mailto:sales@orientalhomegarden.com)

Tel: (888) 670-5570

Copyright © Stanwood Imports / Oriental Touch LLC

